



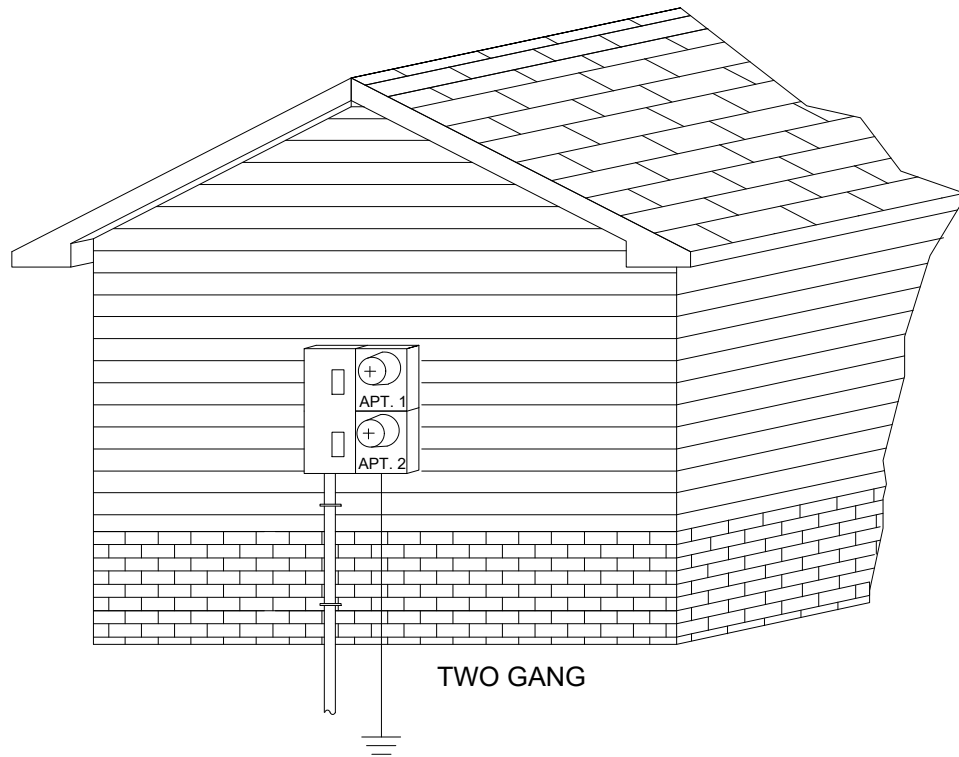

General Notes:

1. Line Side Studs Shall Be Equipped with Nut, Flat Washer, and Pressure Maintaining (as a "Belleville") Spring Washer.
2. Torquing Requirements Shall Be Clearly Marked in the Line Side Compartment. Load Side Conductors Shall Be Properly Torqued By Customer. Line Side Conductors Shall Be Installed and Torqued By NALG&W.
3. Metering Center and Conduit Straps Shall Be Fastened to Building Using Lead Anchors (Brick or Solid Masonry), Toggle Bolts (Other Masonry Siding) or Wood Screws (Studs, Solid Lumber). All Screws and Bolts Shall Be Corrosion Resistant.
4. Two (2) 5/8" x 8' Ground Rods with Bronze Ground Clamps Flush or Just Below Ground Level.
5. Each Socket Position and The Corresponding Building Unit Served (Suite, Apartment, or Office) Shall Be Accurately, Clearly and Permanently Labeled Before Meters Are Installed. Letters and/or Numbers Shall Be A Minimum 1" Height of Contrasting Color.

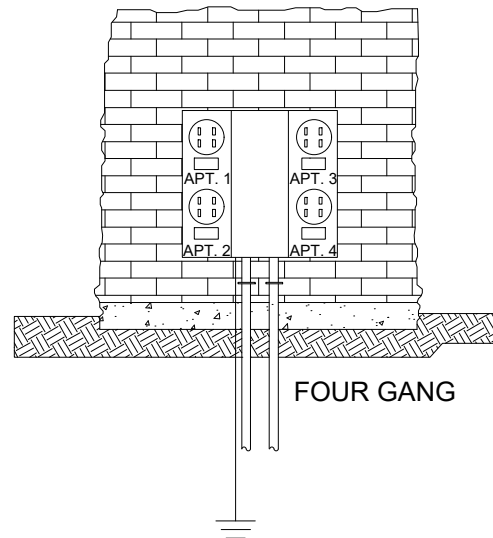

NO.	DATE:	REVISION:	BY:	APPR:




**UNDERGROUND SINGLE PHASE FOR
MULTI-FAMILY HOUSING**

DRAWN BY:	R.E.W.	JOB NO.	113E6001
CHECKED BY:	J.A.	DATE	DECEMBER, 2025
APPROVED BY:		SCALE	NONE

DRAWING NO. NALG&W - 022

SHEET 1 OF 1

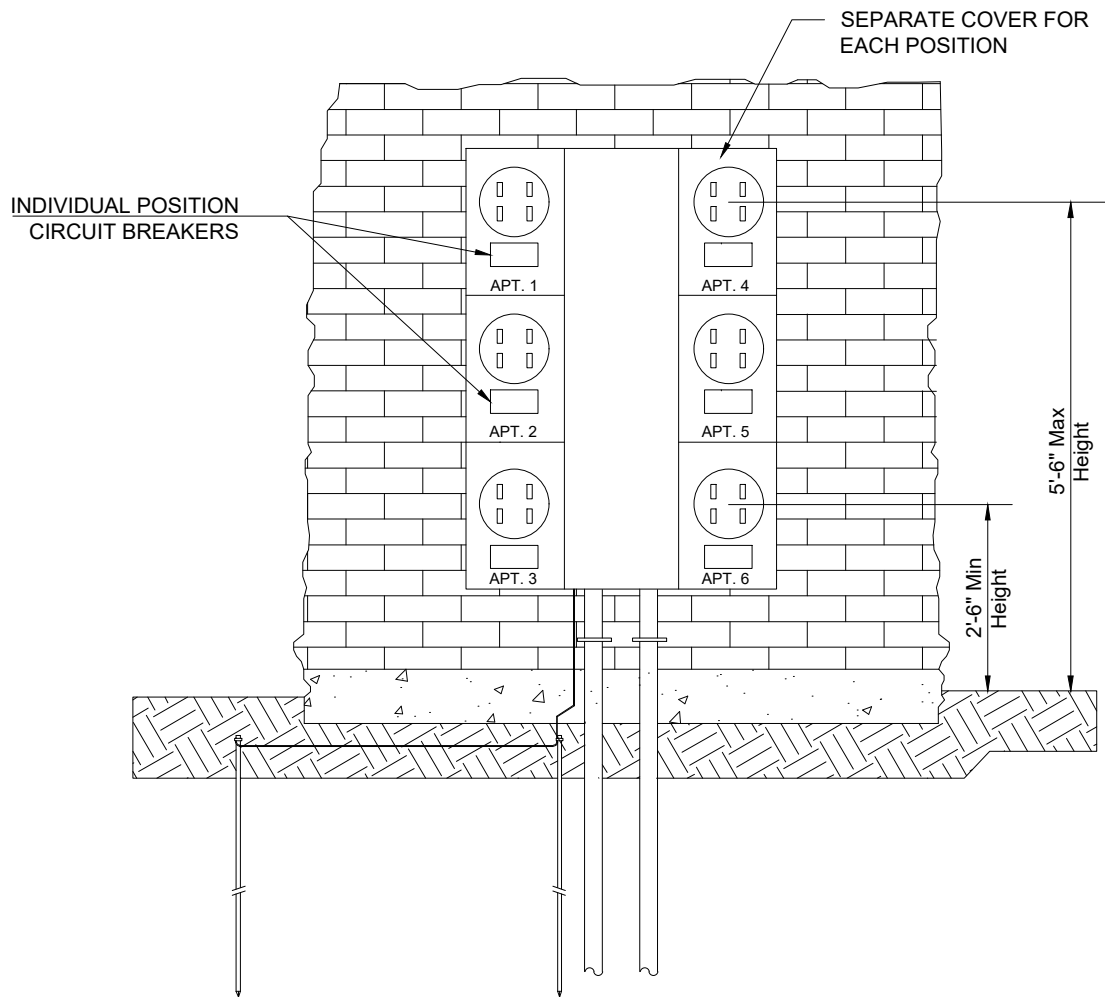

General Notes:

1. Line Side Studs Shall Be Equipped with Nut, Flat Washer, and Pressure Maintaining (as a "Belleville") Spring Washer.
2. Torquing Requirements Shall Be Clearly Marked in the Line Side Compartment. Load Side Conductors Shall Be Properly Torqued By Customer. Line Side Conductors Shall Be Installed and Torqued By NALG&W.
3. Metering Center and Conduit Straps Shall Be Fastened to Building Using Lead Anchors (Brick or Solid Masonry), Toggle Bolts (Other Masonry Siding) or Wood Screws (Studs, Solid Lumber). All Screws and Bolts Shall Be Corrosion Resistant.
4. Two (2) 5/8" x 8' Ground Rods with Bronze Ground Clamps Flush or Just Below Ground Level.
5. Each Socket Position and The Corresponding Building Unit Served (Suite, Apartment, or Office) Shall Be Accurately, Clearly and Permanently Labeled Before Meters Are Installed. Letters and/or Numbers Shall Be A Minimum 1" Height of Contrasting Color.

NO.	DATE:	REVISION:	BY:	APPR:




**UNDERGROUND SINGLE PHASE FOR
MULTI-FAMILY HOUSING**

DRAWN BY:	R.E.W.	JOB NO.	113E6001
CHECKED BY:	J.A.	DATE	DECEMBER, 2025
APPROVED BY:		SCALE	NONE

DRAWING NO. NALG&W - 023

SHEET 1 OF 1

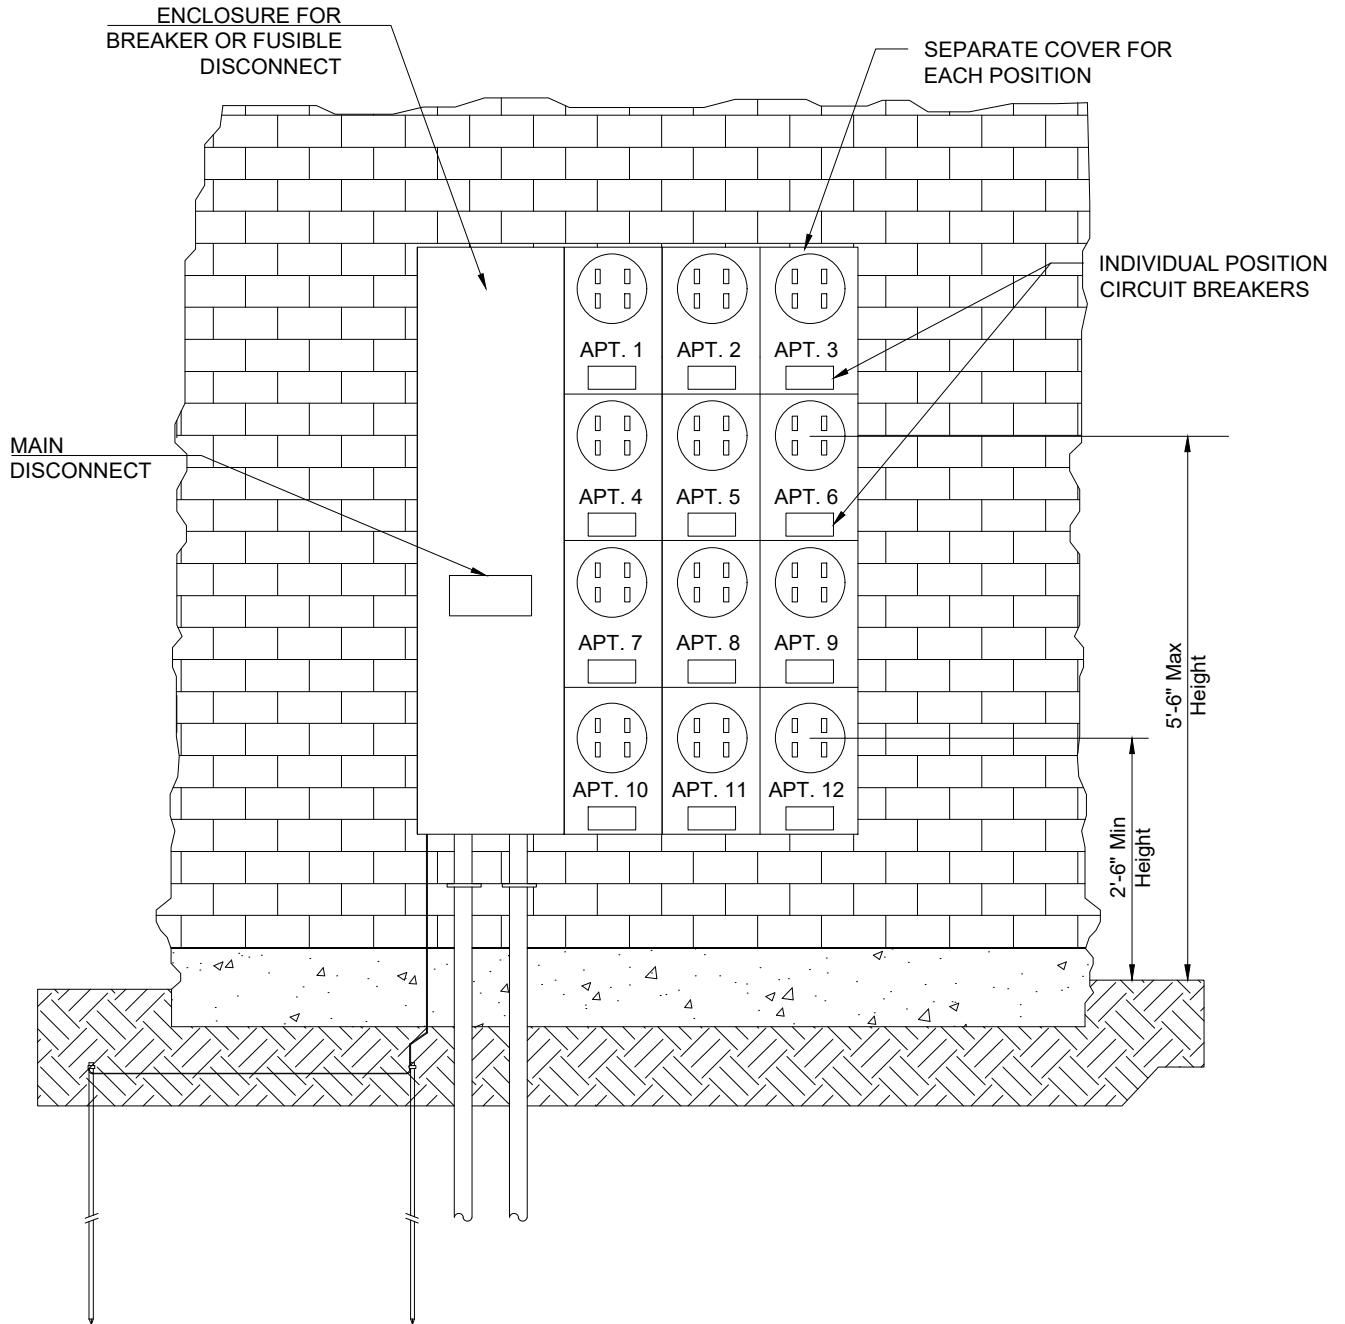

General Notes:

1. Line Side Studs Shall Be Equipped with Nut, Flat Washer, and Pressure Maintaining (as a "Belleville") Spring Washer.
2. Torquing Requirements Shall Be Clearly Marked in the Line Side Compartment. Load Side Conductors Shall Be Properly Torqued By Customer. Line Side Conductors Shall Be Installed and Torqued By NALG&W.
3. Metering Center and Conduit Straps Shall Be Fastened to Building Using Lead Anchors (Brick or Solid Masonry), Toggle Bolts (Other Masonry Siding) or Wood Screws (Studs, Solid Lumber). All Screws and Bolts Shall Be Corrosion Resistant.
4. Two (2) 5/8" x 8' Ground Rods with Bronze Ground Clamps Flush or Just Below Ground Level.
5. Each Socket Position and The Corresponding Building Unit Served (Suite, Apartment, or Office) Shall Be Accurately, Clearly and Permanently Labeled Before Meters Are Installed. Letters and/or Numbers Shall Be A Minimum 1" Height of Contrasting Color.

NO.	DATE:	REVISION:	BY:	APPR:



**MULTI-FAMILY HOUSING INSTALLATION
GREATER THAN 6 POSITIONS**

DRAWN BY:	R.E.W.	JOB NO.	113E6001
CHECKED BY:	J.A.	DATE	DECEMBER, 2025
APPROVED BY:		SCALE	NONE

DRAWING NO. NALG&W - 024

SHEET 1 OF 1